

## Tech Specs

UniFi **UISP** Branding

60 GHz Wireless

Wireless

Fiber

Wired


Accessory Tech

60 GHz Wireless > [Wave Pro](#)

Datasheet

Marketing Images

Installation Guide

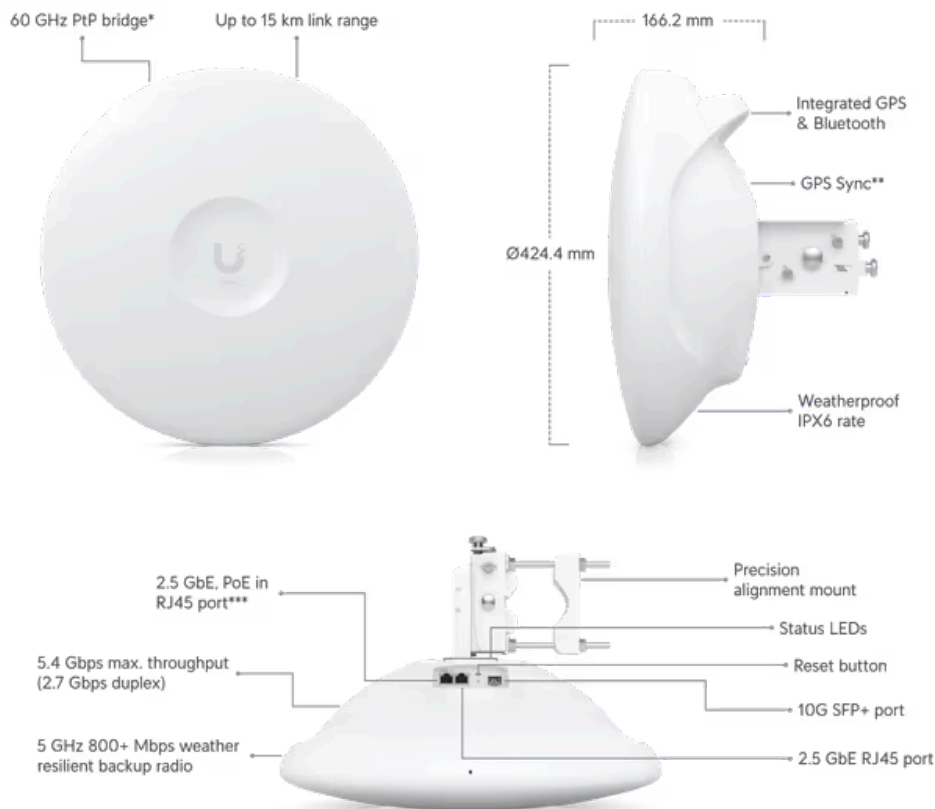

\*Serves as a station for the Wave AP and Wave AP Micro in PtMP mode.

\*\*For devices operating in PTP AP mode with FW version 3.3.0 or later.

\*\*\*48V DC, 0.65A 2.5 GbE PoE adapter included.

## Mechanical

### Dimensions

Ø424.4 x 166.2 mm (Ø16.7 x 6.5")

<b>Weight</b>	Without mount: 2.8 kg (6.2 lb) With mount: 4 kg (8.8 lb)
<b>Enclosure material</b>	Aluminum alloy, UV stabilized plastic
<b>Mount material</b>	Stainless steel
<b>Pole mount diameter</b>	25 to 76.2 mm (1 to 3") on pipe outer diameter
<b>Wind loading</b>	369 N at 200 km/h (83 lbf at 125 mph)
<b>Weatherproofing</b>	IPX6

---

## Hardware

<b>Processor</b>	Quad-core ARM® Cortex®-A53 at 1.4 GHz
<b>Memory</b>	DDR3L 512 MB
<b>Networking interface</b>	(2) 2.5 GbE RJ45 ports (1) 10G SFP+ port
<b>Max. power consumption</b>	26W
<b>Power method</b>	Passive PoE 4-pairs (1, 2+; 3, 6-) (4, 5+; 7, 8-) Passive PoE 2-pairs (4, 5+; 7, 8-), for 44-54V DC only
<b>Power supply</b>	48V DC, 0.65A, 2.5 GbE PoE adapter (Included)
<b>Supported voltage range</b>	44-54V DC 22-27V DC
<b>GPS</b>	Yes
<b>Button</b>	Factory reset
<b>LEDs</b>	Power, (2) Ethernet, SFP+ , GPS, link
<b>Ambient operating temperature</b>	-40 to 60° C (-40 to 140° F)
<b>Ambient operating humidity</b>	5 to 95% noncondensing
<b>Certifications</b>	FCC, IC, CE

---

## Software

<b>Operating mode</b>	PtP, PtMP station
<b>Ubiquiti specific features</b>	Integrated 60 GHz radio, discovery protocol, Wave technology
<b>Services</b>	UISP, ping watchdog, NTP client, SNMP

<b>Tools</b>	Antenna alignment, discovery utility, ping, trace route, speed test, cable test*, site survey* *FW version 3.3.0 and later.
--------------	--

<b>Network</b>	Bridge/Router* mode *Router is available in PtMP station mode only.
----------------	--

<b>Application requirements</b>	UISP: Version 2.3.0 and later
---------------------------------	-------------------------------

---

## System

<b>Total throughput</b>	5.4 Gbps (2.7 Gbps duplex)
-------------------------	----------------------------

<b>Max. range</b>	PtP: Up to 15 km PtMP: Up to 8 km (Wave AP), up to 6 km (Wave AP Micro)
-------------------	--

<b>Encryption</b>	WPA2-PSK (AES)
-------------------	----------------

---

## RF

<b>Operating frequency*</b>	57 to 71 GHz *Depends on regulatory region.
-----------------------------	--

<b>Channel bandwidth</b>	2160, 1080, 540* MHz *FW version 3.3.0 and later.
--------------------------	--

<b>Operating channels*</b>	58320, 59400, 60480, 61560, 62640, 63720, 64800, 65880, 66960, 68040, 69120, 70200 MHz *Depends on regulatory region.
----------------------------	--

<b>Modulation</b>	16QAM, QPSK
-------------------	-------------

<b>Antenna gain</b>	46 dBi
---------------------	--------

<b>Polarization</b>	Vertically linear
---------------------	-------------------

<b>Beamwidth</b>	Azimuth: 3 dB 1.3° Elevation: 3 dB 1.3°
------------------	--

---

## Back-Up RF

<b>WiFi Standard</b>	802.11ax (WiFi 6)
----------------------	-------------------

<b>Operating frequency* US/CA</b>	U-NII-1 5150 - 5250 MHz U-NII-2A 5250 - 5350 MHz U-NII-2C 5470 - 5725 MHz
---------------------------------------	---

U-NII-3 5725 - 5850 MHz

**Worldwide**

5150 - 5875 MHz

\*Depends on regulatory region.

**Channel bandwidth**

20, 40, 80 MHz

**Max. conducted TX power**

27 dBm

**Modulation**

BPSK (1/2), QPSK (1/2), QPSK (3/4), 16QAM (1/2), 16QAM (3/4), 64QAM (2/3), 64QAM (3/4), 64QAM (5/6), 256QAM (3/4), 256QAM (5/6), 1024QAM (3/4), 1024QAM (5/6)

**Antenna gain**

22 dBi

**Polarization**

Dual-linear

**Beamwidth**

Azimuth: 3 dB 8°  
Elevation: 3 dB 8°

**Cross-pol isolation**

20 dB

---

**LEDs**

**Power**

Flashing white: bootup in progress  
White: not connected to UISP application  
Blue: connected to UISP application  
Flashing blue: locate in progress  
Blue/white: firmware upgrade in progress

**Ethernet**

(2) Flashing blue: Ethernet traffic detected

**SFP+**

(1) Flashing blue: SFP+ traffic detected

**Links**

White: 5 GHz link  
Blue: 60 GHz link

**GPS**

Blue: receiving at least (4) GPS satellite signal

[🔗 Compliance Information](#)

**Stay in Touch**

Email

Subscribe



[Terms and Conditions](#) | [Terms of Service](#) | [Privacy Policy](#) | [Return Policy](#) | [Cookies Settings](#)

© 2024 Ubiquiti, Inc. All rights reserved.