


BDJ MINI COUNTER BLOWING MACHINE



OUR TECHNOLOGY YOUR SUCCESS

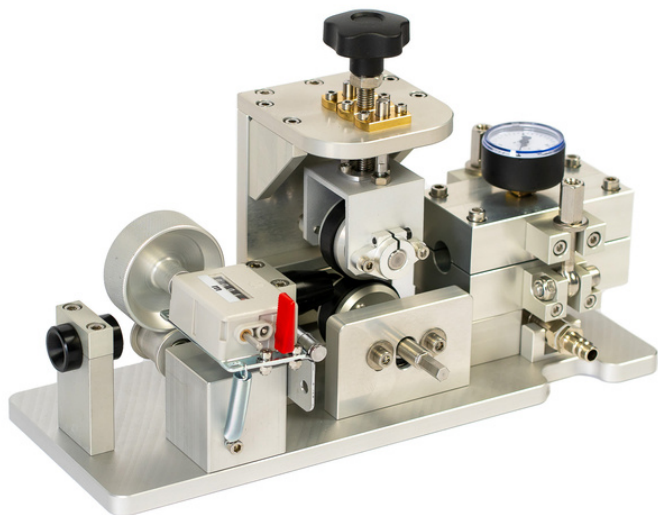

BDJ Mini Counter cable blowing machine is dedicated for last miles of **FTTH network**. Very effective, multifunctional and easy to use. This blowing machine is equipped with sleeves (bushings) allowing to blow in **micro cables from 0,7 mm up**. This manual unit has no motor, so requires external power source, e.g. a cordless drill/driver. The roller drive (feeder) is equipped with removable rubber bands, which can be easily exchanged once they wear off.


Also available: **BDJ Mini - blowing machine without counter.**

BLOWING RANGE:

- **CABLE DIAMETER Ø 0,7 - 10 MM**
- **MICRODUCT DIAMETER Ø 5, 7, 10, 12, 14, 16 MM**

ACCESSORIES IN THE SET:

- A set of gaskets, sleeves for microducts;
- 10 meters air hose;
- 2 x compressor adapter;
- Allen key set;
- Socket wrench 13 for the head;
- A set of calibrating balls;
- 2 pcs of hard bands per roll;
- Cutter for microducts;
- Transport box;
- Microcable blowing lubricant Prelube 5000;
- Manual.

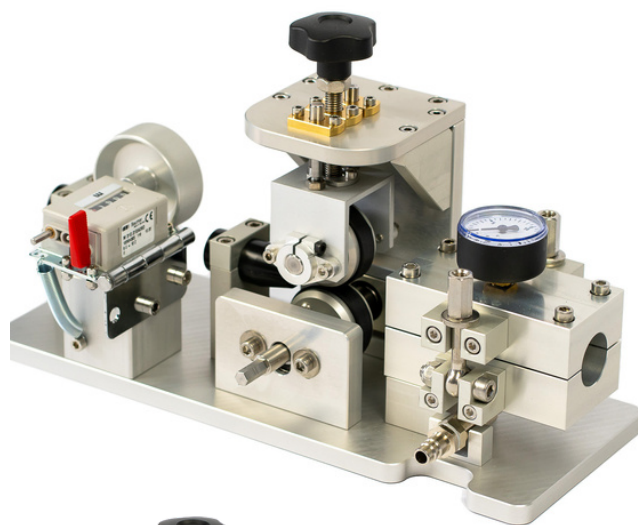

TECHNICAL DATA

MICRO CABLE DIAMETER	Ø 0,7 – 10 mm
MICRO TUBE DIAMETER	Ø 5, 7, 10, 12, 14, 16 mm
BLOWING DISTANCE / MAX	1000 m
BLOWING SPEED / MAX	110 m/min
WORK PRESSURE / MAX	15 bar
DIMENSIONS OF THE UNIT (LXWXH)	260 x 160 x 230 mm waight approx. 5 kg
DIMENSIONS OF THE TRANSPORT BOX	480 x 350 x 330 mm waight approx. 15 kg
AVAILABLE ACCESSORIES	• Lubricant PRELUBE 5000 (240 ml) • Micro duct cutter • Set of bushings • Set of gaskets • Set of Allen keys • Socket wrench • Spare rubber bands for the roller drive • Air hose
REQUIRED COMPRESSOR'S EFFICIENCY	• micro ducts up till 8mm 0,8m³/min • micro ducts 8-12mm - 1,0m³/min • micro ducts 12-16mm - 1,5m³/min
RECOMMENDED COMPRESSOR:	KAESER M17A, ATMOS PB82

**36 MONTHS
WARRANTY**

EQUIPMENT

A SET OF SEALS FOR THE CABLE

Cable seal without hole, Cable gasket:
1.5, 2.5, 3.5, 4, 5, 6, 7, 8, 8.5, 9, 9.5 mm

Gasket for microduct: 4.5, 6.5, 9.5,
11.5, 13.5, 15.5 mm

SET OF BUSHINGS

Sleeve fixing the tube half 2 pcs. of:
5, 7, 10, 12, 14, 16 mm

Cable guiding sleeve half, 2 pcs. of:
2.5, 4, 6, 8, 10 mm

REPLACEABLE RUBBER BANDS FOR ROLLERS

Rubber bands for aluminum roller 60
shA (soft) 33x49x12

Rubber bands for aluminum roller 80
shA (hard) 33x49x12

SET OF CALIBRATION BALLS

2x: 3mm, 5mm, 7mm, 8mm, 10mm

MICRO TUBES CUTTER 0-25 MM

MICROCABLE BLOWING LUBRICANT PRELUBE 5000 0.24L

AIR HOSE - 10 M

ANGLE SOCKET WRENCH WITH 13 MM HANDLE